



Panasonic

PROFESSIONAL LED LIGHTING

PRICELIST 2026



Table of **CONTENTS**



COMMERCIAL
LIGHTING

04



INDUSTRIAL
LIGHTING

28



STREET
LIGHTING

41



FLOOD
LIGHTING

44



LANDSCAPE
LIGHTING

48



SOLAR
LIGHTING

52

COMMERCIAL LIGHTING

Light that moves with you




Panasonic Indoor LED lighting provides a clear advantage over conventional lighting solutions and can free up significant time and resources for building owners, facility managers, and other stakeholders by requiring less maintenance time and materials. LEDs also benefit occupants of the building by providing higher quality lighting, and they help to drive down a building or facility's overhead costs.



Scanto Plus

Recess mounted LED luminaire equipped with CRCA powder coating housing, high transmittance diffuser for symmetric light distribution with non-integral energy efficient electronic driver.

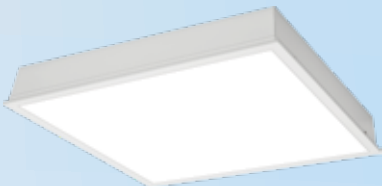


High Spec Baselight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	3000K	PBLM21203	595	x	595	x	70	6100
20W	4000K	PBLM21204	595	x	595	x	70	6100
20W	5700K	PBLM21208	595	x	595	x	70	6100
25W	3000K	PBLM21253	595	x	595	x	70	6100
25W	4000K	PBLM21254	595	x	595	x	70	6100
25W	5700K	PBLM21258	595	x	595	x	70	6100
30W	3000K	PBLM21303	595	x	595	x	70	6100
30W	4000K	PBLM21304	595	x	595	x	70	6100
30W	5700K	PBLM21308	595	x	595	x	70	6100
36W	3000K	PBLM21363	595	x	595	x	70	6150
36W	4000K	PBLM21364	595	x	595	x	70	6150
36W	5700K	PBLM21368	595	x	595	x	70	6150
60W	5700K	PBLM21608R3	595	x	595	x	70	5950

Scanto Elite

Recess mounted LED luminaire equipped with CRCA powder coating housing, high transmittance diffuser for symmetric light distribution with non-integral energy efficient electronic driver.

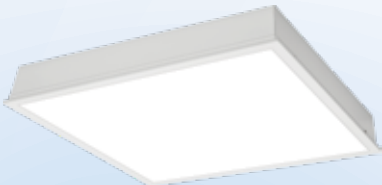

High Spec Baselight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
30W	6500K	PBLM21307R4	595	x	595	x	70	6240
34W	5700K	PBLM22348BA	595	x	595	x	35	4000
60W	6500K	PBLM21607R4	595	x	595	x	70	6100

* Surface Mounted Frame PFMM03000 - MRP:1950



Scanto

Recess mounted Low Depth LED luminaire equipped with CRCA powder coating housing, high transmittance diffuser for symmetric light distribution with non-integral energy efficient Isolated electronic driver.



Low Depth Baselight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
30W	3000K	PBLM22303	595	x	595	x	35	5400
30W	4000K	PBLM22304	595	x	595	x	35	5400
30W	5700K	PBLM22308	595	x	595	x	35	5400
36W	3000K	PBLM22363	595	x	595	x	35	5400
36W	4000K	PBLM22364	595	x	595	x	35	5400
36W	5700K	PBLM22368	595	x	595	x	35	5400
36W	6500K	PBLM22367F	595	x	595	x	35	5400

Scanto Max

Recess mounted clips, low depth luminaire equipped with CRCA powder coating high transmitting diffuser for symmetric light distribution with non-integral isolated electronic driver.



Baselight with Clips


Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
30W	4000K	PBLM22304C	595	x	595	x	35	5200
30W	5700K	PBLM22308C	595	x	595	x	35	5200
36W	4000K	PBLM22364C	595	x	595	x	35	5200
36W	5700K	PBLM22368C	595	x	595	x	35	5200

*Suitable for POP Ceiling via Mounting Clips




Scanto Advance

The 2x2 36W recess mounted baselight comprises of CRCA housing with prismatic diffuser.

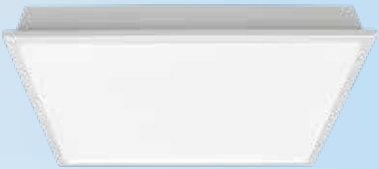

UGR<19 Base Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
30W	3000K	PBLM23303	595	x	595	x	70	7300
30W	4000K	PBLM23304	595	x	595	x	70	7300
30W	5700K	PBLM23308	595	x	595	x	70	7300



UGR<16 Base Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
30W	3000K	PBLM24303	595	x	595	x	35	8300
30W	4000K	PBLM24304	595	x	595	x	35	8300
30W	5700K	PBLM24308	595	x	595	x	35	8300
36W	3000K	PBLM24363	595	x	595	x	35	8300
36W	4000K	PBLM24364	595	x	595	x	35	8300
36W	5700K	PBLM24368	595	x	595	x	35	8300



Scanto Eco

Recess mounted Low Depth LED luminaire equipped with CRCA powder coating housing, high transmittance diffuser for symmetric light distribution with non-integral energy efficient Isolated electronic driver.



Low Depth Baselight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
36W	3000K	PBLM27364R2	595	x	595	x	35	5000
36W	4000K	PBLM27367R2	595	x	595	x	35	5000
36W	6500K	PBLM27368R2	595	x	595	x	35	5000

Scanto S

The Scanto Surface 1x4 36W surface mounted baselight comprises of CRCA housing



1x4 Baselight Surface

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
36W	3000K	PBLM15363	1195	x	292	x	70	8700
36W	4000K	PBLM15364	1195	x	292	x	70	8700
36W	5700K	PBLM15368	1195	x	292	x	70	8700

Scanto R

The Scanto Recess 1x4 36W recess mounted baselight comprises of CRCA housing



1x4 Baselight Recess

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
36W	3000K	PBLM16363	1195	x	292	x	67	8550
36W	4000K	PBLM16364	1195	x	292	x	67	8550
36W	5700K	PBLM16368	1195	x	292	x	67	8550



Slendo Adv

Slendo ADV Suspended Linear light comprises of Aluminium Extrusion with PMMA sliding diffuser, PC end caps and clutch wire suspension kit for mounting arrangement with energy efficient isolated electronic driver - Stand alone & Continuous



Suspended Linear Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
14W	4000K	PLHM10144	605	x	52	x	75	6100
14W	5700K	PLHM10148	605	x	52	x	75	6100
14W	4000K	PLHM10144DD	605	x	52	x	75	13760
14W	4000K	PLHM10144BKPD	605	x	52	x	75	10100
28W	4000K	PLHM10284	1200	x	52	x	75	9900
28W	5700K	PLHM10288	1200	x	52	x	75	9900
28W	4000K	PLHM10284DD	1200	x	52	x	75	13760
28W	4000K	PLHM10284BKPD	1200	x	52	x	75	13900
56W	4000K	PLHM10564	2385	x	52	x	75	19450
56W	5700K	PLHM10568	2385	x	52	x	75	19450
56W	4000K	PLHM10564DD	2385	x	52	x	75	26240
56W	4000K	PLHM10564BKPD	2385	x	52	x	75	23450
10W	4000K	PLHM09108	605	x	52	x	75	5800
10W	5700K	PLHM09108	605	x	52	x	75	5800
10W	5700K	PLHM09108PD	605	x	52	x	75	6380
10W	5700K	PLHM09108PD	605	x	52	x	75	6380
10W	5700K	PLHM09108PD	605	x	52	x	75	6380
10W	4000K	PLHM09104DD	605	x	52	x	75	7600
10W	4000K	PLHM09104PDD	605	x	52	x	75	7900
10W	4000K	PLHM09104PDD	605	x	52	x	75	7900
18W	4000K	PLHM09184	1200	x	52	x	75	9600
18W	5700K	PLHM09188	1200	x	52	x	75	9600
18W	5700K	PLHM09188PD	1200	x	52	x	75	10550
18W	5700K	PLHM09188PD	1200	x	52	x	75	10550
18W	4000K	PLHM09184PD	1200	x	52	x	75	10550
18W	5700K	PLHM09188PD	1200	x	52	x	75	10550
18W	4000K	PLHM09184PD	1200	x	52	x	75	10550



Slendo Adv

Slendo ADV Suspended Linear light comprises of Aluminium Extrusion with PMMA sliding diffuser, PC end caps clutch wire suspension kit for mounting arrangement with energy efficient isolated electronic driver



Suspended Linear Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
18W	5700K	PLHM09188BKPD	1200	x	52	x	75	8770
18W	5700K	PLHM09188BKPD	1200	x	52	x	75	8770
18W	4000K	PLHM09184DD	1200	x	52	x	75	11400
22W	4000K	PLHM09224DD	1200	x	52	x	75	8200
18W	4000K	PLHM09184PDDD	1200	x	52	x	75	11700
18W	4000K	PLHM09184PDDD	1200	x	52	x	75	11700
36W	4000K	PLHM09364	2385	x	52	x	75	18750
36W	5700K	PLHM09368	2385	x	52	x	75	18750
36W	4000K	PLHM09364PD	2385	x	52	x	75	20600
36W	5700K	PLHM09368PD	2385	x	52	x	75	20600
36W	4000K	PLHM09364PD	2385	x	52	x	75	20600
36W	5700K	PLHM09368PD	2385	x	52	x	75	20600
36W	4000K	PLHM09364PD	2385	x	52	x	75	20600
36W	5700K	PLHM09368PD	2385	x	52	x	75	20600
36W	5700K	PLHM09368BKPD	2385	x	52	x	75	17280
36W	4000K	PLHM09364DD	2385	x	52	x	75	20550
36W	5700K	PBLM15368RL	1195	x	150	x	50	3340
36W	4000K	PLHM09364PDDD	2385	x	52	x	75	20850


LINEAR ACCESSORIES

Product Code	Unit Sale Price Rs. per number
PACM10004 - END CAP SET FOR SUSPENDED LINEAR	ON REQUEST
PACM08001 - END CAP FOR RECESS DOWN LINEAR FIXTURE	ON REQUEST
PACM10005 - SUSPENSION SET FOR SUSPENDED LINEAR	ON REQUEST
PACM10006 - MECHANICAL JOINT SET FOR LINEAR FIXTURE	ON REQUEST
PACM10004GY - END CAP FOR SUSPENDED LINEAR GRAY	ON REQUEST
PACM10004BK - END CAP FOR SUSPENDED LINEAR BLACK	ON REQUEST
PACM10007 - MAIN SUPPLY WIRE FOR LINEAR FIXTURE	ON REQUEST
PACM11004 - END CAP SET FOR AL TECHZONE	ON REQUEST



Slendo Flexible

Slendo Flexible Lineat light comprises of Aluminium Extrusion with PMMA sliding diffuser, PC end caps and clutch wire suspension kit for mounting arrangement with energy efficient isolated electronic driver.

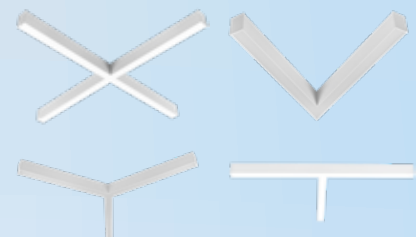

Suspended Linear Shapes

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
36W	5700K	PLHM11368	600	X	52	X	75	28020
36W	4000K	PLHM12364	605	X	52	X	75	27750
36W	5700K	PLHM12368	605	X	52	X	75	27750
18W	4000K	PLHM13184	600	X	52	X	75	15150
18W	5700K	PLHM13188	600	X	52	X	75	15150
18W	4000K	PLHM14184	602	X	52	X	75	15150
18W	5700K	PLHM14188	602	X	52	X	75	15150
28W	4000K	PLHM15284	594	X	52	X	75	20400
28W	5700K	PLHM15288	594	X	52	X	75	20400
28W	4000K	PLHM16284	585	X	52	X	75	20200
28W	5700K	PLHM16288	585	X	52	X	75	20200



Slendo Pro

Aluminium extruded Suspended Linear Light, comprises of PMMA Sliding Diffuser, PC End Caps and Clutch Wire Suspension Kit for Mounting arrangement. This luminaire is recommended for general purpose application in offices, software centres, Reception Areas, Meeting Rooms etc



Suspended Linear Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
10W	4000K	PLHM23104 / PLHM23104BK	600	x	52	x	75	5600
10W	5700K	PLHM23108 / PLHM23108BK	600	x	52	x	75	5600
18W	4000K	PLHM23184 / PLHM23184BK	1195	x	52	x	75	9400
18W	5700K	PLHM23188 / PLHM23188BK	1195	x	52	x	75	9400
36W	4000K	PLHM23364R1 / PLHM23364R1BK	2390	x	52	x	75	16750
36W	5700K	PLHM23368R1 / PLHM23368R1BK	2390	x	52	x	75	16750
10W	4000K	PLHM24144 / PLHM24144BK	605	x	52	x	75	5900
10W	5700K	PLHM24148 / PLHM24148BK	605	x	52	x	75	5900
18W	4000K	PLHM24284 / PLHM24284BK	1200	x	52	x	75	9700
18W	5700K	PLHM24288 / PLHM24288BK	1200	x	52	x	75	9700
36W	4000K	PLHM24564 / PLHM24564BK	2395	x	52	x	75	19250
36W	5700K	PLHM24568 / PLHM24568BK	2395	x	52	x	75	19250

Slendo Prime

Slendo ADV Suspended Linear light comprises of Aluminium Extrusion with PMMA sliding diffuser, PC end caps abd clutch wire suspension kit for mounting arrangement with energy efficient isolated electronic driver




UGR<19 Base Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
36W	4000K	PLHM23364R1	2390	x	52	x	75	16750
36W	5700K	PLHM23368R1	2390	x	52	x	75	16750



Slendo Max

Unique design with deep recessed diffuser to reduce strain on eye. The down type & up-down type deep recessed linear comprises of aluminium housing with clutchwire suspension kit for suspended mounting.

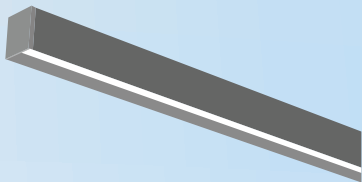


Deco Linear Deep Recessed

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
28W	3000K	PLHM05283	1200	X	55	X	86	13900
28W	4000K	PLHM05284	1200	X	55	X	86	13900
28W	5700K	PLHM05288	1200	X	55	X	86	13900
36W	3000K	PLHM06363	1200	X	55	X	86	15350
36W	4000K	PLHM06364	1200	X	55	X	86	15350
36W	5700K	PLHM06368	1200	X	55	X	86	15350

Slendo Plus

The 28W down type & 36W up-down type laser linear with lens comprises of aluminium housing with clutch wire suspension kit for suspended mounting.

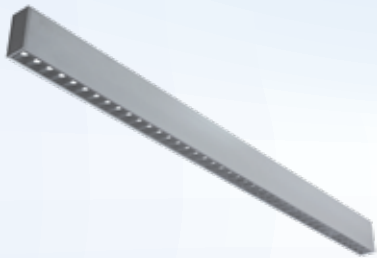

Deco Linear - Laser Linea

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
28W	3000K	PLHM07283	1128	X	40	X	82	17700
28W	4000K	PLHM07284	1128	X	40	X	82	17700
28W	5700K	PLHM07288	1128	X	40	X	82	17700
36W	3000K	PLHM08363	1128	X	40	X	82	18850
36W	4000K	PLHM08364	1128	X	40	X	82	18850
36W	5700K	PLHM08368	1128	X	40	X	82	18850



Slendo Pro

Unique design Slendo Pro with deep recessed diffuser to reduce strain on eye. The deep recessed linear comprises of aluminium housing with clutchwire suspension kit for suspended mounting.



Suspended Linear Light Ugr < 16

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
28W	4000K	PLHM20284	1200	X	58	X	88	11200
28W	5700K	PLHM20288	1200	X	58	X	88	11200
28W	4000K	PLHM21284	1190	X	55	X	85	11200
28W	5700K	PLHM21288	1190	X	55	X	85	11200

Slendo R Adv

The recessed linear comprises of Extruded Aluminium housing with PMMA diffuser, Aluminium End Caps and SS clamps for recess mounting arrangement.



Recessed Linear Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
14W	4000K	PLRM05144	613	X	65	X	34	5200
14W	5700K	PLRM05148	613	X	65	X	34	5200
28W	4000K	PLRM05284	1208	X	65	X	34	8500
28W	5700K	PLRM05288	1208	X	52	X	34	8500
56W	4000K	PLRM05564	1293	X	52	X	34	16800
56W	5700K	PLRM05568	1293	X	52	X	34	16800
10W	4000K	PLRM04104	613	X	52	X	34	5500
10W	5700K	PLRM04108	613	X	52	X	34	5500
18W	4000K	PLRM04184	1208	X	52	X	34	8800
18W	5700K	PLRM04188	1208	X	52	X	34	8800
36W	4000K	PLRM04364	2393	X	52	X	34	16200
36W	5700K	PLRM04368	2393	X	52	X	34	16200



SPUR

The recessed COB Down Light comprises of Die cast aluminium housing with reflector and SS Springs for Recess Mounting arrangement. This luminary is recommended for general purpose application for in offices, classrooms, shops, Reception Areas, Meeting Rooms etc



LED COB Down Light Recessed

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
15W	3000K	PDLM52153	100	X	85	X	71	2700
15W	4000K	PDLM52154	100	X	85	X	71	2700
15W	6500K	PDLM52157	100	X	85	X	71	2700
15W	5700K	PDLM52158	100	X	85	X	71	2700
15W	3000K	PDLM53153	100	X	85	X	71	2700
15W	4000K	PDLM53154	100	X	85	X	71	2700
15W	6500K	PDLM53157	100	X	85	X	71	2700
15W	5700K	PDLM53158	100	X	85	X	71	2700
24W	3000K	PDLM52243	135	X	124	X	85	3300
24W	4000K	PDLM52244	135	X	124	X	85	3300
24W	6500K	PDLM52247	135	X	124	X	85	3300
24W	5700K	PDLM52248	135	X	124	X	85	3300
24W	3000K	PDLM53243	135	X	124	X	85	3300
24W	4000K	PDLM53244	135	X	124	X	85	3300
24W	6500K	PDLM53247	135	X	124	X	85	3300
24W	5700K	PDLM53248	135	X	124	X	85	3300



SPUR

Recess mounting circular LED downlight luminaire with PC housing, anti-glare diffuser and separate energy efficient electronic driver.



PC Downlight								
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
5W	3000K	PDLM01053R2P	116	x	-	x	100	900
5W	4000K	PDLM01054R2P	116	x	-	x	100	900
5W	5700K	PDLM01058R2P	116	x	-	x	100	900
5W	6500K	PDLM01057R2P	116	x	-	x	100	900
10W	3000K	PDLM01103R2P	116	x	-	x	100	950
10W	4000K	PDLM01104R2P	116	x	-	x	100	950
10W	5700K	PDLM01108R2P	116	x	-	x	100	950
10W	6500K	PDLM01107R2P	116	x	-	x	100	950
15W	3000K	PDLM01153R2P	166	x	-	x	150	1200
15W	4000K	PDLM01154R2P	166	x	-	x	150	1200
15W	5700K	PDLM01158R2P	166	x	-	x	150	1200
15W	6500K	PDLM01157R2P	166	x	-	x	150	1200
20W	3000K	PDLM01203R2P	220	x	-	x	205	1800
20W	4000K	PDLM01204R2P	220	x	-	x	205	1800
20W	5700K	PDLM01208R2P	220	x	-	x	205	1800
20W	6500K	PDLM01207R2P	220	x	-	x	205	1800



SPUR

The PC Down Light is a Recessed Down Light which comprises of PC housing with PC Diffuser and SS Spring Clamps for Recessed Mounting arrangement. This luminary is recommended for general application in Homes, Offices, Reception Areas, Shops, Parking Lots, Corridors etc.



PC Downlight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
5W	3000K	PDLM02053R2P	116	x	116	x	100	900
5W	4000K	PDLM02054R2P	116	x	116	x	100	900
5W	5700K	PDLM02058R2P	116	x	116	x	100	900
5W	6500K	PDLM02057R2P	116	x	116	x	100	900
10W	3000K	PDLM02103R2P	116	x	116	x	100	950
10W	4000K	PDLM02104R2P	116	x	116	x	100	950
10W	5700K	PDLM02108R2P	116	x	116	x	100	950
10W	6500K	PDLM02107R2P	116	x	116	x	100	950
15W	3000K	PDLM02153R2P	166	x	166	x	150	1200
15W	4000K	PDLM02154R2P	166	x	166	x	150	1200
15W	5700K	PDLM02158R2P	166	x	166	x	150	1200
15W	6500K	PDLM02157R2P	166	x	166	x	150	1200
20W	3000K	PDLM02203R2P	220	x	220	x	205	1800
20W	4000K	PDLM02204R2P	220	x	220	x	205	1800
20W	5700K	PDLM02208R2P	220	x	220	x	205	1800
20W	6500K	PDLM02207R2P	220	x	220	x	205	1800



Arumi Plus

The Aluminium Down Light, comprises of die cast aluminium housing with PS Diffuser and SS Springs for Recess Mounting arrangement. This luminary is recommended for general purpose application in offices, classrooms, shops, Reception Areas, Meeting Rooms etc.



PC Downlight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
6W	3000K	PDLM35063	121	x	-	x	39	2030
6W	4000K	PDLM35064	121	x	-	x	39	2030
6W	5700K	PDLM35068	121	x	-	x	39	2030
6W	6500K	PDLM35067	121	x	-	x	39	2030
9W	3000K	PDLM35093	121	x	-	x	39	2160
9W	4000K	PDLM35094	121	x	-	x	39	2160
9W	5700K	PDLM35098	121	x	-	x	39	2160
9W	6500K	PDLM35097	121	x	-	x	39	2160
12W	3000K	PDLM35123	165	x	-	x	53	2550
12W	4000K	PDLM35124	165	x	-	x	53	2550
12W	5700K	PDLM35128	165	x	-	x	53	2550
12W	6500K	PDLM35127	165	x	-	x	53	2550
15W	3000K	PDLM35153	165	x	-	x	53	2660
15W	4000K	PDLM35154	165	x	-	x	53	2660
15W	5700K	PDLM35158	165	x	-	x	53	2660
15W	6500K	PDLM35157	165	x	-	x	53	2660
18W	3000K	PDLM35183	165	x	-	x	53	2850
18W	4000K	PDLM35184	165	x	-	x	53	2850
18W	5700K	PDLM35188	165	x	-	x	53	2850
18W	6500K	PDLM35187	165	x	-	x	53	2850
20W	3000K	PDLM35203	165	x	-	x	53	3000
20W	4000K	PDLM35204	165	x	-	x	53	3000
20W	5700K	PDLM35208	165	x	-	x	53	3000
20W	6500K	PDLM35207	165	x	-	x	53	3000
24W	3000K	PDLM35243	165	x	-	x	53	3250
24W	4000K	PDLM35244	165	x	-	x	53	3250
24W	5700K	PDLM35248	165	x	-	x	53	3250
24W	6500K	PDLM35247	165	x	-	x	53	3250



Arumi Pro

The Aluminium Down Light comprises of Die Caste Aluminium housing with PC Diffuser and SS Springs for Recess Mounting arrangement. This luminary is recommended for general purpose application in offices, classrooms, shops, Reception Areas, Meeting Rooms etc.



LED Down Light Recessed Al SMD

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
6W	3000K	PDLM49063	110	x	103	x	26	1850
6W	4000K	PDLM49064	110	x	103	x	26	1850
6W	6500K	PDLM49067	110	x	103	x	26	1850
6W	5700K	PDLM49068	110	x	103	x	26	1850
9W	3000K	PDLM49093	110	x	103	x	26	1950
9W	4000K	PDLM49094	110	x	103	x	26	1950
9W	6500K	PDLM49097	110	x	103	x	26	1950
9W	5700K	PDLM49098	110	x	103	x	26	1950
12W	3000K	PDLM49123	160	x	153	x	26	2350
12W	4000K	PDLM49124	160	x	153	x	26	2350
12W	6500K	PDLM49127	160	x	153	x	26	2350
12W	5700K	PDLM49128	160	x	153	x	26	2350
15W	3000K	PDLM49153	160	x	153	x	26	2450
15W	4000K	PDLM49154	160	x	153	x	26	2450
15W	6500K	PDLM49157	160	x	153	x	26	2450
15W	5700K	PDLM49158	160	x	153	x	26	2450
18W	3000K	PDLM49183	160	x	153	x	26	2650
18W	4000K	PDLM49184	160	x	153	x	26	2650
18W	6500K	PDLM49187	160	x	153	x	26	2650
18W	5700K	PDLM49188	160	x	153	x	26	2650
20W	3000K	PDLM49203	160	x	153	x	26	2800
20W	4000K	PDLM49204	160	x	153	x	26	2800
20W	6500K	PDLM49207	160	x	153	x	26	2800
20W	5700K	PDLM49208	160	x	153	x	26	2800
24W	3000K	PDLM49243	160	x	153	x	26	3050
24W	4000K	PDLM49244	160	x	153	x	26	3050
24W	6500K	PDLM49247	160	x	153	x	26	3050
24W	5700K	PDLM49248	160	x	153	x	26	3050



Arumi Surface

The surface mounted aluminum down light , comprises of die cast aluminum housing & opal diffuser for surface mounting arrangement. This luminary is recommended for general purpose application in offices, classrooms, shops, Reception Areas, Meeting Rooms etc.



LED Down Light Surface Rimless

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
09W	3000K	PDLM58093	130	x	NA	x	50	2150
09W	4000K	PDLM58094	130	x	NA	x	50	2150
09W	5700K	PDLM58097	130	x	NA	x	50	2150
09W	3000K	PDLM58098	130	x	NA	x	50	2150
12W	4000K	PDLM58123	130	x	NA	x	50	2250
12W	5700K	PDLM58124	130	x	NA	x	50	2250
12W	3000K	PDLM58127	130	x	NA	x	50	2250
12W	4000K	PDLM58128	130	x	NA	x	50	2250
15W	5700K	PDLM58153	130	x	NA	x	50	2300
15W	3000K	PDLM58154	130	x	NA	x	50	2300
15W	4000K	PDLM58157	130	x	NA	x	50	2300
15W	5700K	PDLM58158	130	x	NA	x	50	2300
18W	3000K	PDLM58183	170	x	NA	x	50	2850
18W	4000K	PDLM58184	170	x	NA	x	50	2850
18W	5700K	PDLM58187	170	x	NA	x	50	2850
18W	3000K	PDLM58188	170	x	NA	x	50	2850
20W	4000K	PDLM58203	170	x	NA	x	50	2900
20W	5700K	PDLM58204	170	x	NA	x	50	2900
20W	3000K	PDLM58207	170	x	NA	x	50	2900
20W	4000K	PDLM58208	170	x	NA	x	50	2900
24W	5700K	PDLM58243	170	x	NA	x	50	2950
24W	3000K	PDLM58244	170	x	NA	x	50	2950
24W	4000K	PDLM58247	170	x	NA	x	50	2950
24W	5700K	PDLM58248	170	x	NA	x	50	2950



Arumi Pro

An EMI EMC die cast recessed Aluminium downlight with PMMA Diffuser and SS Springs for Recess Mounting arrangement. This luminary is recommended for general purpose application in offices, classrooms, shops, Reception Areas, Meeting Rooms etc.



Aluminium Downlight									
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number	
			L/Dia	X	W/Dia	X	H		
12W	6500K	PDLM35128E	165	X	151	X	53	On Request	
15W	6500K	PDLM35157R4	165	X	151	X	53	On Request	
18W	6500K	PDLM35188E	165	X	151	X	53	On Request	

Arumi Pro - Surface

An EMI EMC die cast Surface Rimless Aluminium downlight with PMMA Diffuser and SS Springs for Surface Mounting arrangement.



Aluminium Downlight									
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number	
			L/Dia	X	W/Dia	X	H		
18W	6500K	PDLM36188E	170	X	NA	X	50	On Request	



Camber Modan Adv

The rimless surface mounted downlight comprises of PC housing with high quality diffuser and MS clamps for surface mounting arrangement



Rimless Surface Downlight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
6W	3000K	PDLM36063	Ø100	x	-	x	31	1040
6W	4000K	PDLM36064	Ø100	x	-	x	31	1040
6W	5700K	PDLM36068	Ø100	x	-	x	31	1040
6W	6500K	PDLM36067	Ø100	x	-	x	31	1040
12W	3000K	PDLM36123	Ø125	x	-	x	31	1600
12W	4000K	PDLM36124	Ø125	x	-	x	31	1600
12W	5700K	PDLM36128	Ø125	x	-	x	31	1600
12W	6500K	PDLM36127	Ø125	x	-	x	31	1600
18W	3000K	PDLM36183	Ø150	x	-	x	31	2080
18W	4000K	PDLM36184	Ø150	x	-	x	31	2080
6W	3000K	PDLM37063	100	x	100	x	31	1040
6W	4000K	PDLM37064	100	x	100	x	31	1040
6W	5700K	PDLM37068	100	x	100	x	31	1040
6W	6500K	PDLM37067	100	x	100	x	31	1040
12W	3000K	PDLM37123	125	x	125	x	31	1600
12W	4000K	PDLM37124	125	x	125	x	31	1600
12W	5700K	PDLM37128	125	x	125	x	31	1600
12W	6500K	PDLM37127	125	x	125	x	31	1600
18W	5700K	PDLM36188	150	x	150	x	31	2080
18W	6500K	PDLM36187	150	x	150	x	31	2080
18W	3000K	PDLM37183	150	x	150	x	31	2080
18W	4000K	PDLM37184	150	x	150	x	31	2080
18W	5700K	PDLM37188	150	x	150	x	31	2080
18W	6500K	PDLM37187	150	x	150	x	31	2080



Slendo Tech Plus

The recess mounted techzone luminaire comprises of aluminium extrusion housing with PMMA sliding diffuser.



Aluminium Techzone

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
18W	4000K	PTZM03184	1195	x	146	x	48	11400
18W	5700K	PTZM03188	1195	x	146	x	48	11400
28W	4000K	PTZM04284	1195	x	146	x	48	11400
28W	5700K	PTZM04288	1195	x	146	x	48	11400
36W	4000K	PTZM03364	2395	x	146	x	48	21800
36W	5700K	PTZM03368	2395	x	146	x	48	21800
56W	4000K	PTZM04564	2395	x	146	x	48	21800
56W	5700K	PTZM04568	2395	x	146	x	48	21800
14W	4000K	PTZM03144	1195	x	146	x	48	10900
14W	5700K	PTZM03148	1195	x	146	x	48	10900
22W	4000K	PTZM04224	1195	x	146	x	48	11450
22W	5700K	PTZM04228	1195	x	146	x	48	11450
28W	4000K	PTZM03284	2395	x	146	x	48	20500
28W	5700K	PTZM03288	2395	x	146	x	48	20500
44W	4000K	PTZM04444	2395	x	146	x	48	24750
44W	5700K	PTZM04448	2395	x	146	x	48	24750


Techzone Dimmable

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
18W	6500K	PTZM03187DD	1195	x	146	x	48	7200
22W	4000K	PTZM03224DD	1195	x	146	x	48	8400
22W	4000K	PTZM04224DD	1195	x	146	x	48	8400
28W	4000K	PTZM04284PDDD	2395	x	146	x	48	15400
56W	4000K	PTZM04564PDDD	2395	x	146	x	48	25800



Harrow Adv AL

The Aluminium Batten comprises of Extruded Aluminium housing & PC Diffuser, PC End Caps and SS Clamps for Surface Mounting arrangement. This luminaire is recommended for general purpose application in offices, classrooms, shops etc

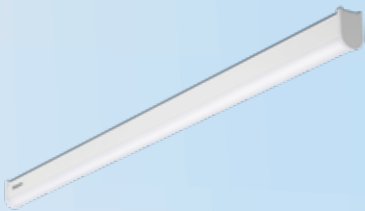

LED Batten Light IP20 AL

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	2700	PBTM26202	1140	x	23	x	38	700
20W	3000	PBTM26203	1140	x	23	x	38	700
20W	4000	PBTM26204	1140	x	23	x	38	700
20W	5000	PBTM26205	1140	x	23	x	38	700
20W	6500	PBTM26207	1140	x	23	x	38	700
20W	5700	PBTM26208	1140	x	23	x	38	700
36W	2700	PBTM26362	1180	x	23	x	38	2660
36W	3000	PBTM26363	1180	x	23	x	38	2660
36W	4000	PBTM26364	1180	x	23	x	38	2660
36W	5000	PBTM26365	1180	x	23	x	38	2660
36W	6500	PBTM26367	1180	x	23	x	38	2660
36W	5700	PBTM26368	1180	x	23	x	38	2660



SPINDLE SUSPENDED

Circular suspended mounted LED luminaire comprises of CRCA housing matt powder coated in black. The LED clusters are assembled in the body & high efficiency translucent frosted diffuser is used for uniform glare-free light distribution.



Circular Suspended Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
25	4000K	PDLM20254	300	x	-	x	85	11110
25	5700K	PDLM20258	300	x	-	x	85	11110
40	4000K	PDLM20404	600	x	-	x	85	22550
40	5700K	PDLM20408	600	x	-	x	85	22550

SPINDLE SURFACE

Circular surface mounted LED luminaire comprises of CRCA housing matt powder coated in black. The LED clusters are assembled in the body & high efficiency translucent frosted diffuser is used for uniform glare-free light distribution.



Circular Surface Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
25	4000K	PDLM21254	300	x	-	x	85	10050
25	5700K	PDLM21258	300	x	-	x	85	10050
40	4000K	PDLM21404	600	x	-	x	85	21500
40	5700K	PDLM21408	600	x	-	x	85	21500



PEAR

Cylindrical suspended mounted LED luminaire comprises of AL housing matt powder coated in black is used for modern offices, recreation area & other interiors. Special translucent diffuser used for better lighting distribution.



Cylindrical Suspended Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
12	4000K	PDLM18124	102	x	-	x	200	8050
12	5700K	PDLM18128	102	x	-	x	200	8050
20	4000K	PDLM18204	102	x	-	x	200	8050
20	5700K	PDLM18208	102	x	-	x	200	8050

PEAR

Cylindrical suspended mounted LED luminaire comprises of AL housing matt powder coated in black is used for modern offices, recreation area & other interiors. Special translucent diffuser used for better lighting distribution.



Cylindrical Suspended Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
12	4000K	PDLM19124	102	x	-	x	200	7650
12	5700K	PDLM19128	102	x	-	x	200	7650
20	4000K	PDLM19204	102	x	-	x	200	7650
20	5700K	PDLM19208	102	x	-	x	200	7650



SPINDLE CYLINDER

The Cylindrical Down Light comprises of Aluminium housing with reflector & Ceiling Rose with Cable Gland for Suspended Mounting. This luminary is recommended for general purpose application for concrete ceiling , true ceiling and POP ceiling .



Cylinder COB Downlight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
15W	4000K	PDLM54154	NA	x	76	x	200	5500
15W	5700K	PDLM54158	NA	x	76	x	200	5500
15W	4000K	PDLM55154	NA	x	76	x	200	5500
15W	5700K	PDLM55158	NA	x	76	x	200	5500
15W	4000K	PDLM56154	NA	x	76	x	200	5500
15W	5700K	PDLM56158	NA	x	76	x	200	5500
15W	4000K	PDLM57154	NA	x	76	x	200	5500
15W	5700K	PDLM57158	NA	x	76	x	200	5500
20W	4000K	PDLM54204	NA	x	95	x	200	7000
20W	5700K	PDLM54208	NA	x	95	x	200	7000
20W	4000K	PDLM55204	NA	x	95	x	200	7000
20W	5700K	PDLM55208	NA	x	95	x	200	7000
20W	4000K	PDLM56204	NA	x	95	x	200	7000
20W	5700K	PDLM56208	NA	x	95	x	200	7000
20W	4000K	PDLM57204	NA	x	95	x	200	7000
20W	5700K	PDLM57208	NA	x	95	x	200	7000
30W	4000K	PDLM54304	NA	x	95	x	200	9000
30W	5700K	PDLM54308	NA	x	95	x	200	9000
30W	4000K	PDLM55304	NA	x	95	x	200	9000
30W	5700K	PDLM55308	NA	x	95	x	200	9000
30W	4000K	PDLM56304	NA	x	95	x	200	9000
30W	5700K	PDLM56308	NA	x	95	x	200	9000
30W	4000K	PDLM57304	NA	x	95	x	200	9000
30W	5700K	PDLM57308	NA	x	95	x	200	9000

INDUSTRIAL LIGHTING

Enhance productivity with
sustainable and
smart infrastructure




Industrial lighting goes beyond illuminating production lines and machinery — it ensures that people can work safely, accurately, and efficiently. In industries like manufacturing, mining, petrochemical, and warehousing, the right lighting improves visibility, reduces errors, and enhances safety. High-performance fixtures are built to withstand harsh environments, extreme temperatures, and demanding conditions. By optimizing lux levels and using smart lighting to minimize energy waste, industrial lighting not only boosts productivity but also protects workers and equipment every day



Enviso Advance

Aesthetically designed advance 180 System Efficacy LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



LED Circular Baylight 60°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
100W	5700	PBYM21AB8	320	x	NA	x	106	19895
120W	5700	PBYM21CD8	320	x	NA	x	106	26450
150W	5700	PBYM21FG8	360	x	NA	x	106	29210

LED Circular Baylight 90°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
100W	5700	PBYM22AB8	320	x	NA	x	106	19895
120W	5700	PBYM22CD8	320	x	NA	x	106	26450
150W	5700	PBYM22FG8	360	x	NA	x	106	29210

Enviso Advance - EMI EMC

Aesthetically designed advance EMI EMC POTTED range LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



Highbay - EMI EMC Range

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
64W	5700K	PBYM15648R5 - 160 LPW- CRI 80-FRLSZH Internal Wiring	244	x	NA	x	124	3710
70W	5700K	PBYM17708E - 150 LPW- CRI 70-PVC Internal Wiring	290	x	NA	x	130	14800
100W	6500K	PBYM15AB7R4 - 150 LPW - CRI 80-Ripple<=10%	280	x	NA	x	130	12830
100W	5700K	PBYM17AB8E - 150 LPW- CRI 70-PVC Internal Wiring	280	x	NA	x	130	17300
100W	5700K	PBYM14AB8BA - 150 LPW- CRI 80	244	x	NA	x	130	On Request
120W	6500K	PBYM15CD7R4 - 150 LPW- CRI 80-Ripple<=10%	280	x	NA	x	132	16700
120W	5700K	PBYM14CD8BA - 150 LPW- CRI 80	340	x	NA	x	125	On Request
125W	5700K	PBYM151258R5 - 160 LPW- CRI 80-FRLSZH Internal Wiring	280	x	NA	x	132	5455
150W	6500K	PBYM15FG7R4 - 150 LPW- CRI 80-Ripple<=10%	280	x	NA	x	132	17440
155W	5700K	PBYM151558R5 - 160 LPW- CRI 80-FRLSZH Internal Wiring	280	x	NA	x	132	5790
200W	6500K	PBYM15MN7R4 - 140 LPW- CRI 80-Ripple<=10%	340	x	NA	x	125	18460



Enviso Eco

Aesthetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver of 10kV SPD to meet the different requirement across Industrial application.



LED Circular Baylight 60°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM14808R7	244	x	NA	x	123	14800
100W	5700K	PBYM14AB8R7	244	x	NA	x	123	17300
120W	5700K	PBYM14CD8R7	280	x	NA	x	154	20000
150W	5700K	PBYM14FG8R7	280	x	NA	x	132	25400
180W	5700K	PBYM14KL8R7	340	x	NA	x	125	29650
200W	5700K	PBYM14MN8R7	340	x	NA	x	125	34500

Enviso Eco

Aesthetically designed robust150 System Efficacy LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.




LED Circular Baylight 90°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM15808R7	244	X	NA	X	123	14800
100W	5700K	PBYM15AB8R7	244	x	NA	x	123	17300
120W	5700K	PBYM15CD8R7	280	x	NA	x	154	20000
150W	5700K	PBYM15FG8R7	280	x	NA	x	132	25400
180W	5700K	PBYM15KL8R7	340	x	NA	x	125	29650
200W	5700K	PBYM15MN8R7	340	x	NA	x	125	34500



Enviso Range

Aesthetically designed robust 140 System Efficacy LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



LED Circular Baylight 90°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
150W	5700	PBYM18FG8R6	265	x	NA	x	170	On Request
180W	5700	PBYM18MN8R6	302	x	NA	x	175	On Request

Enviso Range - DALI

Aesthetically designed robust DALI LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



LED Circular Baylight 90°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
150W	5700	PBYM15FG8HRD	340	x	NA	x	175	On Request
200W	5700	PBYM15KL8HRD	340	x	NA	x	175	On Request

Enviso Wide Range

Aesthetically designed robust Wide Range LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



LED Circular Highbay Wide Optics

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
150W	5700K	PBYM16FG8W0	Ø330	x	-	x	160	30000
180W	5700K	PBYM16KL8W0	Ø330	x	-	x	160	35000
200W	5700K	PBYM16MN8W0	Ø330	x	-	x	160	40000



ENVISO ECO MAX

Aesthetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



LED Circular Baylight 60°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM17808	Ø244	x	-	x	130	15000
100W	5700K	PBYM17AB8	Ø244	x	-	x	130	16000
120W	5700K	PBYM17CD8	Ø287	x	-	x	110	17000
150W	5700K	PBYM17FG8	Ø287	x	-	x	110	22000
180W	5700K	PBYM17KL8	Ø340	x	-	x	125	40000

ENVISO ECO MAX

Aesthetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



LED Circular Baylight 90°

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM18808	Ø244	x	-	x	130	15000
100W	5700K	PBYM18AB8	Ø244	x	-	x	130	16000
120W	5700K	PBYM18CD8	Ø287	x	-	x	110	17000
150W	5700K	PBYM18FG8	Ø287	x	-	x	110	22000
180W	5700K	PBYM18KL8	Ø340	x	-	x	125	40000



Batten Aluminium

The Industrial Aluminium Batten comprises of Extruded Aluminium housing ,PC Diffuser, PC End Caps and SS Clamps for Surface Mounting arrangement. This luminary is recommended for general purpose application in offices, warehouses, shops etc.



AL Housing

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
18W	5700K	PBTM28188	590	x	40	x	55	1900
36W	5700K	PBTM28368	1180	x	40	x	55	2200

HARROW

The Industrial batten comprises of White Powder Coated CRCA Housing with PC Diffuser, PC End Caps and Spring Steel Clamps for Surface Mounting arrangement. This luminary is recommended for application in Factories, Warehouses, Parking Areas etc.



Industrial Batten - IP20

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	4000K	PBTM12204	1185	x	43	x	62	5400
20W	5700K	PBTM12208	1185	x	43	x	62	5400
45W	4000K	PBTM12454	1185	x	43	x	62	6500
45W	5700K	PBTM12458	1185	x	43	x	62	6500
45W	5700K	PBTM12458E - EMI EMC	1185	x	43	x	62	3840



HARROW

LED Batten for surface application. White powder coated CRCA / AL housing with LEDs. Seamless front frame is with white high transmission acrylic cover and decorative end cap.



Industrial Batten - IP20

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	5000K	PBTM12205HR	1185	x	43	X	62	5000
40W	5000K	PBTM12405HR	1185	x	43	X	62	7500
50W	5000K	PBTM12505HR	1185	x	43	X	62	8000
59W	5700K	PBTM12598BAHR-AL	1185	x	43	X	62	13440
59W	4000K	PBTM12594BA-AL	1185	x	43	X	62	7600
59W	5700K	PBTM12598BA-AL	1185	x	43	X	62	13440

TRUSS ADV

The IP66 Industrial batten comprises of Co-extrusion PC Housing, PP End Caps and ABS Mounting Clamps for Surface Mounting arrangement. This luminary is recommended for application in Factories, Warehouses, Parking Areas etc.




Industrial Batten - IP66

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
18W	5700K	PBTM19188	1200	x	44.6	X	44.6	5000
20W	5700K	PBTM19208E	1200	x	44.6	X	44.6	4500
40W	5700K	PBTM19408E	1200	x	44.6	X	44.6	5000



TRUSS ADV

LED Batten with inbuilt heat sink, polycarbonate housing equipped with anti-glare diffuser & energy efficient electronic driver.

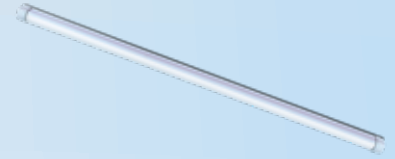

Industrial Batten - IP66

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	4000K	PBTM19204	1200	X	44.6	X	44.6	4850
20W	5700K	PBTM19208	1200	X	44.6	X	44.6	4850
40W	4000K	PBTM19404	1200	X	44.6	X	44.6	5750
40W	5700K	PBTM19408	1200	X	44.6	X	44.6	5750
40W	6500K	PBTM19407	1200	X	44.6	X	44.6	5750

Trunking Batten

Aluminium trunking system with LED Trunk with energy efficient electronics driver along with rating for lighting compartment.



Al Trunking Batten

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
40W*	5700K	PTBM03408	1200	X	82	X	52	9650
40W	5700K	PTBM05408 - IP66	1204	X	45	X	75	5500
40W	5700K	PBTM03408 - IP54	1200	X	82	X	52	9650
Trunking	System	PATM03153	1500	X	56.5	X	50	2100
Trunking	System	PATM03155	1500	X	56.5	X	50	2300
Trunking	System	PATM03157	1500	X	56.5	X	50	2500
Trunking	System	PATM03303	3000	X	56.5	X	50	#N/A
Trunking	System	PATM03305	3000	X	56.5	X	50	#N/A
Trunking	System	PATM03307	3000	X	56.5	X	50	#N/A
Trunking	System	PATM03353	3500	X	56.5	X	50	#N/A
Trunking	System	PATM03355	3500	X	56.5	X	50	#N/A
Trunking	System	PATM03357	3500	X	56.5	X	50	4850

* PTBM05408, PBTM03408 - Accessories of the Trunk shall be additional of codes PTNK05408 (IP66 - 4Ft Trunk) || IP54 Trunk - PATM03153/5/7 | PATM03303/5/7 | PATM03353/5/7



Merlin

Aesthetically designed robust LED well glass, equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across industrial application, suitable for easy replacement of conventional HID lamps



Well Glass

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
40W	5700K	PWGM17408	146	x	NA	X	195	2620
40W	5700K	PWGM18408	146	x	NA	X	195	2600
70W	5700K	PWGM17708	190	x	NA	X	210	7000
70W	5700K	PWGM18708	190	x	NA	X	210	7000

Merlin Advance

Aesthetically designed Advanced LED well glass, equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across industrial application, suitable for easy replacement of conventional HID lamps. This product is clear in glass having CRI → 80, clear diffuser with 1Mtr. FRLSZH wiring.



Well Glass Advance

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
35W	6500K	PWGM17357R6	147	x	NA	X	177	6700
70W	6500K	PWGM17707R6	147	x	NA	X	177	12200



CANO PRO

LED Under Canopy luminaire aesthetically designed with better thermal management. Housing made of PDC and MS frame with toughened glass. This LED luminaire is designed to replace conventional under canopy applications. It is also recommended for Industrial application.



Under Canopy

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
100W	5700K	PCNM02AB8	286	X	257	X	53.5	14800

CANO - LINEAR UNDER CANOPY

Recess mounted Linear Canopy is a Special Multi-functional LED luminaire with extruded Aluminium Housing & Polycarbonate diffuser designed to replace traditional square under canopy lights in fuel bunks.




BOCR with Screw & MS Bottom Frame

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
40W	5700K	PCNM05408	1210	x	83	x	125	On Request
80W	5700K	PCNM05808	2410	x	83	x	125	On Request



BOCR With Magnet & MS Bottom Frame

LED Cleanroom recess mounted luminaire with bottom opening consist of CRCA white powder coated CRCA housing and anti glare diffuser for uniform light distribution. MS bottom frame without screw.

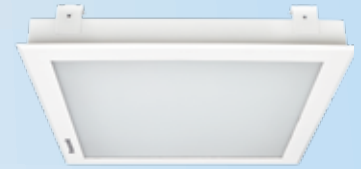

BOCR With Magnet & MS Bottom Frame

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
18W	4000K	PCRM04184	300	x	300	x	65	8850
18W	5700K	PCRM04188	300	x	300	x	65	8850
22W	4000K	PCRM04224	300	x	300	x	65	8850
22W	5700K	PCRM04228	300	x	300	x	65	8850
28W	4000K	PCRM04284	300	x	300	x	65	8850
28W	5700K	PCRM04288	300	x	300	x	65	8850
45W	4000K	PCRM04454	600	x	600	x	65	19900
45W	5700K	PCRM04458	600	x	600	x	65	19900
60W	4000K	PCRM04604	600	x	600	x	65	19900
60W	5700K	PCRM04608	600	x	600	x	65	19900

IMBUE

IP 65, dust free & zero maintenance LED Clean Room Top opening luminaire with CRCA powder coating housing, anti glare diffuser with integrated energy efficient electronic driver.




TOCR with Screw & MS Frame

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
45W	4000K	PCRM08454	650	x	650	x	75	25350
45W	5700K	PCRM08458	650	x	650	x	75	25350
60W	4000K	PCRM08604	650	x	650	x	75	25350
60W	5700K	PCRM08608	650	x	650	x	75	25350



BOCR With Magnet & SS Bottom Frame

LED Cleanroom recess mounted luminaire with bottom opening consist of CRCA white powder coated CRCA housing and anti glare diffuser for uniform light distribution. SS bottom frame without screw.



BOCR with Magnet & SS Bottom Frame

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
45W	4000K	PCRM06454	600	x	600	x	65	23150
45W	5700K	PCRM06458	600	x	600	x	65	23150
18W	4000K	PCRM06184	300	x	300	x	65	9700
18W	5700K	PCRM06188	300	x	300	x	65	9700
22W	4000K	PCRM06224	300	x	300	x	65	9700
22W	5700K	PCRM06228	300	x	300	x	65	9700
28W	4000K	PCRM06284	300	x	300	x	65	9700
28W	5700K	PCRM06288	300	x	300	x	65	9700
60W	4000K	PCRM06604	600	x	600	x	65	22850
60W	5700K	PCRM06608	600	x	600	x	65	22850
60W	4000K	PCRM03604	600	x	600	x	65	23000
60W	5700K	PCRM03608	600	x	600	x	65	23000

IMBUE

IP 65, dust free & zero maintenance LED Clean Room Top opening luminaire with CRCA powder coating housing, anti glare diffuser with integrated energy efficient electronic driver.



TOCR with Screw & MS Frame

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
45W	4000K	PCRM07454	650	x	650	x	75	23000
45W	5700K	PCRM07458	650	x	650	x	75	23000
60W	4000K	PCRM07604	650	x	650	x	75	23000
60W	5700K	PCRM07608	650	x	650	x	75	23000



VIADUCT

The LED Via Duct/Tunnel light comprise of extended Aluminium housing with PC moulded diffuser and adjustable mounting arrangement with tilt arrangement +/-60 degree. This luminaire is recommended for applications like tunnel, railway, metros etc.



Via Duct

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	5700K	PVDM01208	375	x	80	x	107.5	9600
30W	5700K	PVDM01308	375	x	80	x	107.5	10000
45W	5700K	PVDM01458	452	x	80	x	123	10000

STREET LIGHTING

Superior illumination
performance
& Flexibility you need



When designing or making changes in street lighting, it is important to first understand the light requirements of the road. Street lighting in India is classified in the Indian Standard (BIS, 1981), based on the traffic density of the road. Based on the classification in the code, the Lighting Designer matches the category of road, and designs and provides installation specifications for the street lighting system.



Bloom Street Lighting Range

Bloom Street light luminaire comprises of die cast Aluminum housing consist of separate driver & Lighting engine compartment for better accessibility with IP Lens and pipe mounting. This luminaire is recommended for illuminating access roads, traffic routes etc.



Bloom : IP Lens Street Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20W	5700K	PSTM29208R1	315	x	120	x	50	3570
25W	5700K	PSTM29258R1	315	x	120	x	50	3660
30W	5700K	PSTM29308R1	315	x	120	x	50	4270
35W	5700K	PSTM29358R1	355	x	126	x	60	4560
45W	5700K	PSTM29458R1	355	x	126	x	60	6080
60W	5700K	PSTM29608R1	420	x	161	x	50	8200
70W	5700K	PSTM22708R5	390	x	110	x	71.5	5150
90W	5700K	PSTM22908R2	344	x	212	x	97	12300
120W	5700K	PSTM23CD8R1 - Glass	362	x	232	x	87	14850

Bloom Street light luminaire comprises of die cast Aluminium housing with special design 60X60 IP Lens and pipe mounting. This luminaire is recommended for illuminating accessroads, traffic routes etc.



Bloom : IP Lens Street Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
150W	5700K	PSTM22FG8R5	510	x	270	x	95	13800
180W	5700K	PSTM22KL8R5	510	x	270	x	95	15000
200W	5700K	PSTM22MN8R5	510	x	270	x	95	16000
220W	5700K	PSTM22OP8R5	570	x	270	x	95	19200
250W	5700K	PSTM22RS8R5	552	x	330	x	95	19900
280W	5700K	PSTM22UV8R5	552	x	330	x	95	24000



Bloom Street Lighting Range

Bloom Street light luminaire comprises of die cast Aluminium housing with IP Lens and pipe mounting. This luminaire is recommended for illuminating access roads, traffic routes, NHA1 etc.



Bloom : IP Lens Street Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
180	5700K	PSTM22KL8R4	510	x	270	x	95	20960
200	5700K	PSTM22MN8R4	510	x	270	x	95	21280
220	5700K	PSTM22OP8R4	510	x	270	x	95	22000
240	5700K	PSTM22QR8R4	510	x	270	x	95	32960
250	5700K	PSTM22RS8R4	510	x	270	x	95	23360
300	5700K	PSTM22WX8R4	552	x	330	x	95	27840

Bloom Street light luminaire comprises of die cast Aluminium housing with Toughened Glass, pipe mounting. This luminaire is recommended for illuminating access roads, traffic routes etc



Bloom : Toughned Glass LED Street Light

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
180W	5700K	PSTM22KL8R3	535	x	265	x	95	21250
200W	5700K	PSTM22MN8R3	505	x	265	x	95	22500
220W	5700K	PSTM22OP8R3	552	x	330	x	96	23750
250W	5700K	PSTM22RS8R3	552	x	330	x	96	25000

Bloom Street light luminaire comprises of die cast Aluminium housing with IP Lens and pipe mounting. This luminaire is recommended for illuminating access roads, traffic routes etc.



Bloom : IP Lens Street Light with Wider Optics

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
180W	5700K	PSTM22KL8W0	506	x	266	x	97	29760
200W	5700K	PSTM22MN8W0	506	x	266	x	97	30720
220W	5700K	PSTM22OP8W0	506	x	266	x	97	30560
250W	5700K	PSTM22QR8W0	506	x	266	x	97	32960
300W	5700K	PSTM22WX8W0	552	x	332	x	100	35000

FLOOD LIGHTING

Where performance
meets precision lighting



Flood lights are used to illuminate a wide area while projecting a broad angle. Be it hoardings, stadiums, tall buildings, with flood light luminaire, you can cover a wider range of surface when mounted at a well-defined and proper position.



Flano

Flood light luminaire comprises of pressure die cast aluminium housing (ADC 12) with frame and toughened glass, cradle mounting.



LED Floodlight								
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
70	5700K	PFLM19708	230	x	200	x	57	10900
90	5700K	PFLM18908	285	x	210	x	61	13800
90	5700K	PFLM19908	285	x	210	x	61	10000
100	5700K	PFLM18AB8	285	x	210	x	72	15500
100	5700K	PFLM26AB8R1	270	x	263	x	67	6750
120	5700K	PFLM26CD8	270	x	263	x	67	8550
150	5700K	PFLM18FG8R1	325	x	258	x	72	10000
150	5700K	PFLM26FG8	424	x	274	x	69	14304
200	5700K	PFLM26MN8	424	x	274	x	69	15840
200	5700K	PFLM18MN8	350	x	285	x	85	27100
200	5700K	PFLM18MN8R1	350	x	285	x	85	22500



Flano Pro

Flood light luminaire comprises of die cast aluminium housing with toughened glass and PC lens, cradle mounting.



LED Streetlight

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
250	5000K	PFLM18RS8	365	x	465	x	140	38900
300	5000K	PFLM20WX8R1	485	x	198	x	172	42000
350	5700K	PFLM20ZC8R1	560	x	350	x	90	50000
400	5700K	PFLM20ZH8	560	x	350	x	90	55400
500	5700K	PFLM20ZS8R1	600	x	325	x	175	72000
500	5700K	PFLM20ZS8HR5	600	x	325	x	175	70000
1000	5700K	PFLM2010008HR1N	675	x	640	x	290	140000
1000	5700K	PFLM2010008R1N	675	x	640	x	290	140000
1000	5700K	PFLM201008HR1	675	x	640	x	290	135000
1000	5700K	PFLM201008R1	675	x	640	x	290	135000
1600	5700K	PFLM321600810N	600	x	450	x	470	290000

* For Product of Non Integral 1KW the Control Gear Box is PACM01FCG @45000.

* R1 Series of 1KW has integral Control Box



Flano RGBW

The RGBW Flood Light features a durable aluminum die-cast body with powder-coated finish and tempered glass cover. With DMX512/RDM control and a 180° adjustable pedestal. Designed with concealed wiring in an IP68 junction box, it ensures reliable outdoor performance with a lifespan of up to 50,000 burning hours. Suitable for architectural lighting, façades, landscapes, gardens, building exteriors, monuments etc.



Flood Light RGBW								
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
15	RGBW	PFLM2215RW08	NA		NA		NA	NA
24	RGBW	PFLM2224RW08	NA		NA		NA	30005
24	RGBW	PFLM2224RW12	NA		NA		NA	30000
24	RGBW	PFLM2224RW36	NA		NA		NA	30005
58	RGBW	PFLM2258RW08	NA		NA		NA	70000
58	RGBW	PFLM2258RW12	NA		NA		NA	55000
58	RGBW	PFLM2264RW12	NA		NA		NA	70000
120	RGBW	PFLM22CDR30	NA		NA		NA	110000
120	RGBW	PFLM22CDRW10	NA		NA		NA	110000
120	RGBW	PFLM22CDRW12	NA		NA		NA	60000
120	RGBW	PFLM22CDRW30	NA		NA		NA	110000
300	RGBW	PFLM22WXRW10	NA		NA		NA	67000
300	RGBW	PFLM22WXRW30	NA		NA		NA	67000

LANDSCAPE LIGHTING

Creating meaningful lighting
for outdoor space



The perfect lighting solution illuminates the outdoors aesthetically and completely with functional benefits. If you are looking to highlight certain aspects of your layout while ensuring smooth operations of the lights, choose our landscape lighting.

With our products, you have the right lighting to illuminate a private space of your own or public areas. Choose to up the aesthetics of a chosen area, up to safety and accessibility. Be it any event, brighten it up with Panasonic Post Top and Bollards.



SANDO

Aesthetically designed IP65 LED Post Top light comprises of spun aluminium top cover, die cast aluminium heat sink, frosted polycarbonate diffuser and die cast aluminium mounting base arm.



LED Post Top

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
40	5700K	PPTM02408R1	410	x	410	x	415	19440
40	4000K	PPTM02404R1	410	x	410	x	415	19440

KINOKO

Aesthetically designed IP65 LED Post Top light comprises of spun aluminium top cover, die cast aluminium heat sink, frosted polycarbonate diffuser and die cast aluminium mounting base arm.



LED Post Top

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
20	5700K	PPTM02208R1	330	x	330	x	405	#N/A
20	4000K	PPTM02204R1	330	x	330	x	405	#N/A

KYYNEL

Aesthetically designed IP65 LED Post Top light comprises of spun aluminium top cover, die cast aluminium heat sink, frosted polycarbonate diffuser and die cast aluminium mounting base arm.



LED Post Top

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
60	4000K	PPTM02604R1	450	x	450	x	660	28600
60	5700K	PPTM02608R1	450	x	450	x	660	28600
70	4000K	PPTM02704R1	450	x	450	x	660	29100
70	5700K	PPTM02708R1	450	x	450	x	660	29100



Leo Post Top

Leo Post top comprises of die cast Aluminium housing with Aluminium reflector. It is ideal for lighting garden pathways and landscaped areas.



LED Post Top

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
25W	3000K	PPTM04253	595	x	NA	x	283	15000
25W	4000K	PPTM04254	595	x	NA	x	283	15000
25W	5700K	PPTM04258	595	x	NA	x	283	15000
45W	3000K	PPTM04453	595	x	NA	x	283	18000
45W	4000K	PPTM04454	595	x	NA	x	283	18000
45W	5700K	PPTM04458	595	x	NA	x	283	18000

FANAL

Aesthetically designed IP65 LED Post Top light comprises of spun aluminium top cover, die cast aluminium heat sink, frosted polycarbonate diffuser and die cast aluminium mounting base arm.



LED Post Top

Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
40	4000K	PPTM03404R1	410	x	410	x	545	20850
40	5700K	PPTM03408R1	410	x	410	x	545	20850
60	4000K	PPTM03604R1	410	x	410	x	545	22760
60	5700K	PPTM03608r1	410	x	410	x	545	22760



Arcturus Bollard

Arcturus Bollard comprises of die cast Aluminium housing with PC Diffuser and aluminium Die Cast Base Plate. It is ideal for lighting garden pathways and landscaped areas.



LED Bollard								
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
10W	3000K	PBDM04103	NA	x	99	x	600	12000
10W	5700K	PBDM04108	NA	x	99	x	600	12000

BORADO

Aesthetically designed IP65 LED BOLLARD luminaire comprises of galvanised extruded mild steel pipe housing with opal polycarbonate diffuser and aluminium mounting base.



LED Bollard								
Wattage	CCT	Product Code	Product Dimesions (mm)					Unit Sale Price Rs. per number
			L/Dia	X	W/Dia	X	H	
10W	5700K	PBDM03108	180	x	105	x	1000	15700
10W	4000K	PBDM03104	180	x	105	x	1000	15700

SOLAR STREETLIGHTS

The Perfect Combination
of Design, Technology
and Sustainability!



Introducing our advanced solar streetlights, designed to set a new standard in outdoor lighting. Equipped with high-performance Monocrystalline Solar Panels and reliable Lithium Ferro Phosphate Batteries, these streetlights capture and store energy with maximum efficiency.



ALL IN ONE INTEGRATED MODELS

All-in-One solar street lights feature efficient monocrystalline panels, durable batteries, and high-lumen LEDs for energy-saving, long-lasting performance. Easy to maintain, they provide bright illumination for highways, rural areas, campuses, hospitals, and public spaces.



(CCT - → 5500K / CRI →70 / 2Day Backup)

Product Code	LED LIGHT RATING (W)	Solar Panel (W)	Battery (Ah)	Lumen efficacy (Lm/W)	Lumen (Lm)	Unit Sale Price Rs. per number
PA012W11MLF2404	12	30	12	150 Lm/W	>1800	50667
PA015W11MLF2404	15	40	18	150 Lm/W	>2250	56000
PA020W11MLF2404	20	50	18	150 Lm/W	>3000	58667
PA024W11MLF2404	24	60	24	150 Lm/W	>3600	61333
PA030W16MLF2404	30	80	30	150 Lm/W	>4500	75467
PA040W11MLF2404	40	100	36	150 Lm/W	>6000	85333
PA030W11MLF2416	30	60	24	150 Lm/W	>4500	61333
PA040W11MLF2416	40	80	30	150 Lm/W	>6000	78400
PA050W11MLF2404	50	125	48	150 Lm/W	>7500	109787
PA060W11MLF2404	60	150	54	150 Lm/W	>9000	112000
PA060W11MLF2419	60	180	78	150 Lm/W	>10000	131808
PA080W11MLF2404	80	180	78	150 Lm/W	>12000	136533
PA100W11MLF2421	100	200	96	150 Lm/W	>15000	148800
PA060W19MLF2419	60	180	78	190 Lm/W	>11400	134400
PA060W19MLF2440	60	180	96	190 Lm/W	>11400	144000
PA080W19MLF2419	80	200	96	190 Lm/W	>15200	157333
PA060W19MLF2441	60	200	90	190 Lm/W	>11400	153333



ALL IN ONE INTEGRATED MODELS

All-in-One solar street lights feature efficient monocrystalline panels, durable batteries, and high-lumen LEDs for energy-saving, long-lasting performance. Easy to maintain, they provide bright illumination for highways, rural areas, campuses, hospitals, and public spaces.



(CCT - →5500K / CRI →70 / 2Day Backup/ Inbuilt SPD)

Product Code	LED LIGHT RATING (W)	Solar Panel (W)	Battery (Ah)	Lumen efficacy (Lm/W)	Lumen (Lm)	Unit Sale Price Rs. per number
PB012W11MLF2404	12	30	12	150 Lm/W	>1800	61867
PB015W11MLF2404	15	40	18	150 Lm/W	>2250	67200
PB020W11MLF2404	20	50	18	150 Lm/W	>3000	69867
PB024W11MLF2404	24	60	24	150 Lm/W	>3600	72533
PB030W16MLF2404	30	80	30	150 Lm/W	>4500	86667
PB040W11MLF2404	40	100	36	150 Lm/W	>6000	96533
PB030W11MLF2416	30	60	24	150 Lm/W	>4500	72533
PB040W11MLF2416	40	80	30	150 Lm/W	>6000	89600
PB050W11MLF2404	50	125	48	150 Lm/W	>7500	120987
PB060W11MLF2404	60	150	54	150 Lm/W	>9000	129067
PB060W11MLF2419	60	180	78	150 Lm/W	>10000	148875
PB080W11MLF2404	80	180	78	150 Lm/W	>12000	153600
PB100W11MLF2421	100	200	96	150 Lm/W	>15000	165867
PB060W19MLF2419	60	180	80	190 Lm/W	>11400	151467
PB060W19MLF2440	60	180	96	190 Lm/W	>11400	161067
PB080W19MLF2419	80	200	96	190 Lm/W	>15200	174400
PB060W19MLF2441	60	200	90	190 Lm/W	>11400	170400



DC SOLAR STREETLIGHT

DC (Semi-Integrated) street lights combine the charge controller, LED, and battery in one luminaire, with the solar panel mounted separately. This design allows flexible installation—optimizing solar panel direction for better energy capture while adjusting luminaire tilt for precise illumination.



(CCT - → 5500K / CRI →70 / 2Day Backup)

Product Code	LED LIGHT RATING (W)	Solar Panel (W)	Battery (Ah)	Lumen efficacy (Lm/W)	Lumen (Lm)	Unit Sale Price Rs. per number
PC090W11MLF2414	9	30Wp	12Ah	150 lm/W	>1350	6900
PC012W11MFL2414	12	40Wp	18Ah	150 lm/W	>1800	7600
PC015W11MFL2414	15	50Wp	18Ah	150 lm/W	>2250	7990
PC020W11MFL2414	20	60Wp	24Ah	150 lm/W	>3000	8575
PC024W11MFL2414	24	75Wp	30Ah	150 lm/W	>3600	9275
PC030W09MLF2414	30	100Wp	42Ah	150 lm/W	>4500	12550
PC040W13MLF2414	40	125Wp	48Ah	150 lm/W	>6000	12000
PC040W11MLF2419	40	150Wp	54Ah	150 lm/W	>6000	15750
PC050W11MFL2414	50	150Wp	54Ah	150 lm/W	>7500	16000

STANDALONE SOLAR STREETLIGHT

Standalone street lights feature a modular design with separate components for flexible installation. Easy access ensures quick maintenance and reliable, uninterrupted illumination.



(CCT - → 5500K / CRI →70 / 2Day Backup)

Product Code	LED LIGHT RATING (W)	Solar Panel (W)	Battery (Ah)	Lumen efficacy (Lm/W)	Lumen (Lm)	Unit Sale Price Rs. per number
PD012W07XLF24XX	12W	75Wp	30Ah	130Lm/w	1560Lm	Prices available on request
PD090W07XLF24XX	90W	335Wp	72/78 Ah	150Lm/w	13500Lm	
PD100W07XLF24XX	100W	450Wp	84/90/96 Ah	150Lm/w	15000Lm	
PD120W07XLF24XX	120W	540Wp	102/108Ah	150Lm/w	18000Lm	
PD150W07XLF24XX	150W	540Wp	120/126Ah	150Lm/w	22500Lm	

TERMS AND CONDITIONS

- 1) Prices are in INR (₹).
- 2) All prices are subject to the general terms and conditions of our business.
- 3) Prices are subject to change without prior notice.
- 4) This price list supersedes all our previous price lists.
- 5) If any dispute should arise it will be subject to Thane jurisdiction.
- 6) Company reserves the right to issue amendments which may arise due to any errors in the price list.
- 7) Colour in images are for reference purpose only, please see product for actual colour.

Due to continuous improvements in product design and development and manufacturing methods, the product may differ in some aspects from the details provided herein.

PANASONIC LIFE SOLUTIONS INDIA PVT. LTD.

Corporate & Head Office: 3rd Floor, B Wing, I-Think Techno Campus,
Pokharan Road No.2, Thane (W), Thane - 400 607, Maharashtra.

Tel. 022 4222 8888 | Fax. 022 4222 8884

Customer Care no.: 022-41304130 | WhatsApp: 9136028606

Email: wecare@in.panasonic.com | www.isin.panasonic.com

Registered Office: 12th Floor, Ambience Tower, Ambience Island,
NH-48, Gurugram - 122 002, Haryana.



[www.facebook.com/
AnchorPanasonic](https://www.facebook.com/AnchorPanasonic)



[www.twitter.com/
AnchorPanasonic](https://www.twitter.com/AnchorPanasonic)



[https://in.linkedin.com/
company/anchor-panasonic](https://in.linkedin.com/company/anchor-panasonic)



[www.instagram.com/
anchorpanasonic/](https://www.instagram.com/anchorpanasonic/)

